


1/2" Superflex Jumper, N male straight to N Male straight

Specifications :

Part No.	12S-NM-NM-L
Electrical Performance	
Characteristic Impedance	50 ohm
Frequency Range	DC-6GHz
VSWR	≤1.12(DC-3GHz),
PIM3	≤-155dBc
Dielectric Withstanding Voltage	≥2500V RMS,50Hz,at sea level
Dielectric Resistance	≥5000MΩ
Contact Resistance	Center Contact ≤0.4mΩ Outer Contact ≤0.2mΩ
Durability	Mating cycles ≥500
Material and plating	
Body	Brass, Tri-Alloy plating
Insulator	PTFE, NATURAL
Contact PIN	Phosphor Bronze,Ag plating
Environmental	
Temperature Range	-40°C~+85°C
Waterproof(1m water depth, 24hours)	IP68
RoHS	Full RoHS-Compliance

Outline drawing :

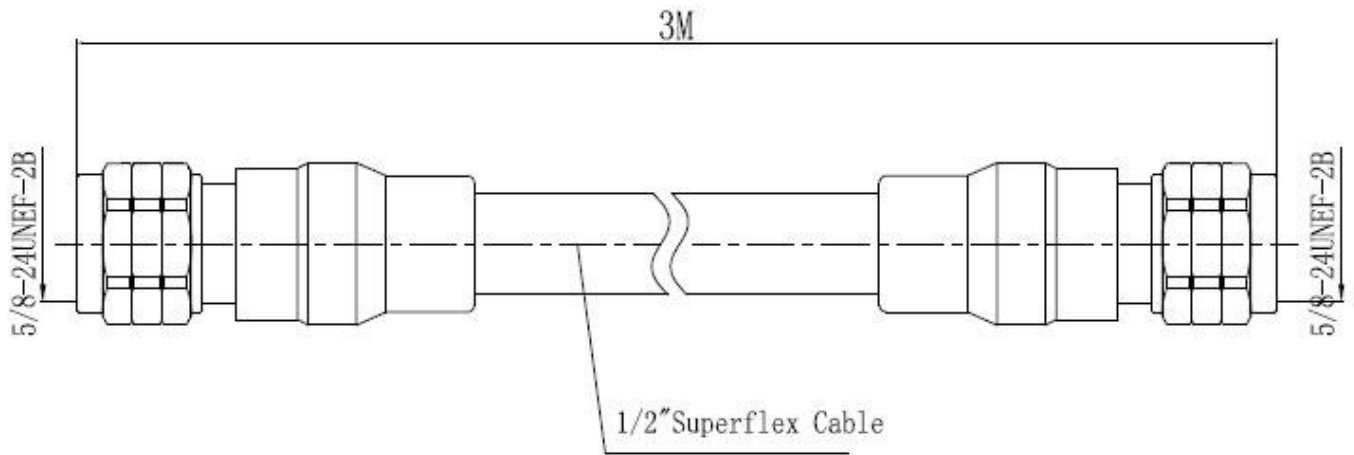

Product picture :

